



THE ORIGINAL Tile Leveling & Spacing System



LEVEL: Anchor adjusts to the tiles so they remain level throughout the installation

ALIGN: Designed to address variations in


tile thickness

SPACE: Produces a 1/16" wide grout joint

between tiles

HOLD: Holds tiles firmly in place to ensure a

lippage-free surface

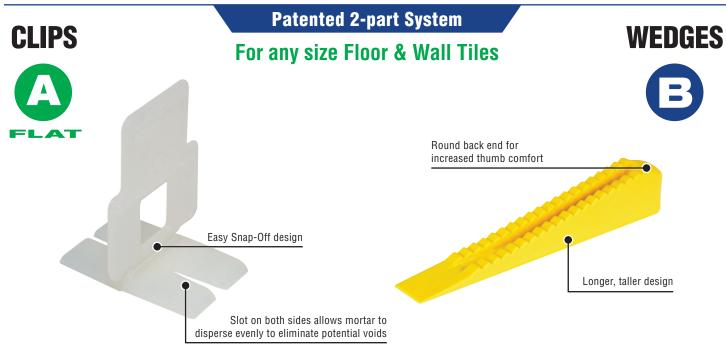

Designed for quick installation, the LASH® Tile Leveling System (sold separately) reduces costly call backs by ensuring that the finished tile surface is lippage-free. It is the perfect system to use with any size rectified porcelain, thin porcelain tile, marble and stone tiles for floor and wall. This fast, simple system is the most cost effective installation method on the market to eliminate lippage.

The LASH System provides narrow 1/16" grout lines. For grout joints up to 1/4", traditional spacers can be used.

U.S. Patent No. 7,992,354

The Brand that Stands for Excellence.

www.QEP.com

Also available in the Original Curved LASH design for large format floor tiles.

Easy to install and remove!

Watch a demonstration video at: www.lashspacer.com



Slide two clips under the tile and into the mortar approximately 2" from each end of the tile. Place the second tile.



Slide the reusable wedges into the clips to LEVEL, ALIGN, SPACE and **HOLD** the tiles.



Once mortar has set, simply tap the clips with a non-marring rubber mallet to snap off at the specially designated break-points. Save wedges for future use.

The LASH system should only be used with a minimum 1/4" x 3/8" x 1/4" square trowel notch to apply the setting material. Back buttering your tile is always recommended.

Item #	Туре	Quantity
99730Q	A Clips	96/bag (8/case)
99726Q	B Wedges	96/bag (8/case)
99750Q	Pliers	(6/case)
99757Q	Pro Pliers	(6/case)

96 🔼 🕂	+ 96 B
Tile Size	Coverage
6" x 24"	24 ft ²
12" x 24"	38.4 ft ²
18" x 18"	72 ft²
24" x 24"	32 ft²

Speed up installation with LASH Pliers

99750Q **LASH Pliers**



The Brand that Stands for Excellence.



www.QEP.com